





**Eye Lag
Self Drill Point
Zinc Plated**

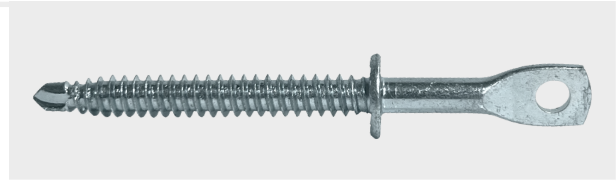

Size	TPI	Part #	QTY / Carton	Hole Diameter	Flange Diameter
1/4 x 2"	14	ELSDZ1420	1,000	3/16"	9/16"
1/4 x 3"	14	ELSDZ1430	1,000	3/16"	9/16"

material: C1022 Low Carbon Steel, Core Hardness: HV240-425
finish: Zinc plating provides 24 hour minimum salt spray corrosion resistance
application: Used to attach wire for interior suspended ceiling systems; drywall or installation to steel

Meet or exceeds the following specifications:



- AC500** ICC-ES Acceptance Criteria for self-drilling tapping screws used to attach miscellaneous building materials to steel or wood base material
- ASTM A510** Specification for general requirements for carbon steel wire rods (Minimum grade 1018)
- ASTM B117** Standard practice for operating salt spray (fog) apparatus
- SAE J78** Standard for dimensional, mechanical, and performance requirements

Ultimate Values

	Diameter	22 Gauge	20 Gauge	18 Gauge	16 Gauge	14 Gauge	12 Gauge
Tension (lb) Pullout	1/4"	233	282	442	813	957	1344
Shear (lb) Bearing	1/4"	235	338	445	841	1001	1218

ELSDZ | Revision 1.0 | 09.15.25