




**Square-Phillips Ultra Low Pancake Head  
Type 17 Point  
410 Stainless Steel Dagger-Guard Coating™**

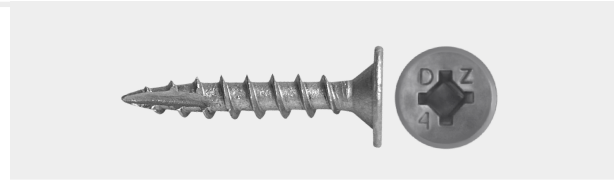

Size	TPI	Part #	QTY / Carton	Drive
10 x 1-1/8"	9	LOPROUSS1011008	5,000	#2 Square-Phillips

- material:** 410 Stainless Steel. Case Hardness: HV500 minimum
- finish:** Dagger-Guard Coating™ is a three layer, multi step dip/spin/bake process which provides 1000 hour salt spray corrosion resistance
- application:** Light metal exterior applications
- installation:** Screw gun with depth sensitive nosepiece with installation speed not to exceed 2500 RPM. Overdriving may result in fastener failure or strikeout of the work surface. The fastener must penetrate beyond the metal with a minimum of three threads protruding past the back side. The use of impact drivers is not recommended, as they can strip or break the screw.

**Meet or exceeds the following specifications:**



- ASTM A276** Specification for stainless steel bars or shapes
- ASTM B117** Standard practice for operating salt spray (fog) apparatus
- ASTM C1002** Specification for steel self-piercing tapping screws for application of gypsum panel products or metal plaster bases to wood or steel studs
- ASTM F1941** Specification for electrodeposited coatings on threaded fasteners

**Ultimate Values**

	Diameter	25 Gauge	20 Gauge	3/4" Particle Board	2 x 4 Fir	Minimum Torsional Strength (lb)
<b>Tension (lb) Pullout</b>	#10	173	397	649	547	56
<b>Shear (lb) Bearing</b>	#10	363	834	-	-	56

LOPROUSS | Revision 1.0 | 04.08.26