




INTERNATIONAL FASTENERS, INC.

SPEC DATA SUBMITTAL SHEET




Dagger-Con™ Concrete Screws • Hex Flange Quick-Con • Yellow Zinc

Size	TPI	Ctn Qty	Daggerz™ Part Number	Drive	Head	Point	Drill Bit
1/4 x 1-3/4	15	2,000	QCZ14134	5/16"	Hex Flange	Diamond	3/16"
1/4 x 2-1/4	15	1,000	QCZ14214	5/16"	Hex Flange	Diamond	3/16"
1/4 x 3	15	1,000	QCZ1430	5/16"	Hex Flange	Diamond	3/16"
1/4 x 4	15	500	QCZ1440	5/16"	Hex Flange	Diamond	3/16"
1/4 x 5	15	500	QCZ1450	5/16"	Hex Flange	Diamond	3/16"
1/4 x 6	15	250	QCZ1460	5/16"	Hex Flange	Diamond	3/16"
3/8 x 3	16	350	QCZ3803	9/16"	Hex Flange	Diamond	5/16"
3/8 x 4	16	300	QCZ3804	9/16"	Hex Flange	Diamond	5/16"
3/8 x 5	16	250	QCZ3805	9/16"	Hex Flange	Diamond	5/16"
3/8 x 7	16	200	QCZ3807	9/16"	Hex Flange	Diamond	5/16"

<i>material:</i>	C1022 LOW CARBON STEEL, CORE HARDNESS: HV240-425
<i>finish:</i>	Yellow Zinc Finish provides 48 hour minimum salt spray corrosion resistance
<i>application:</i>	concrete and masonry screw applications that require a larger bearing surface for added strength.
<i>installation:</i>	Pre-drill hole with masonry bit. Screw gun with depth sensitive nosepiece with installation speed not to exceed 2500 RPM into pre-drilled hole. Overdriving may result in fastener failure or strikeout of the work surface. The fastener is fully seated when the head's bearing surface is flush with the material being attached.

Meets or exceeds the following specifications:

ASTM A510	Specification for General Requirements for Wire Rods and Coarse Round Wire, Carbon Steel (Minimum grade 1018)
ASTM B117	Practice for Operating Salt Spray (Fog) Apparatus

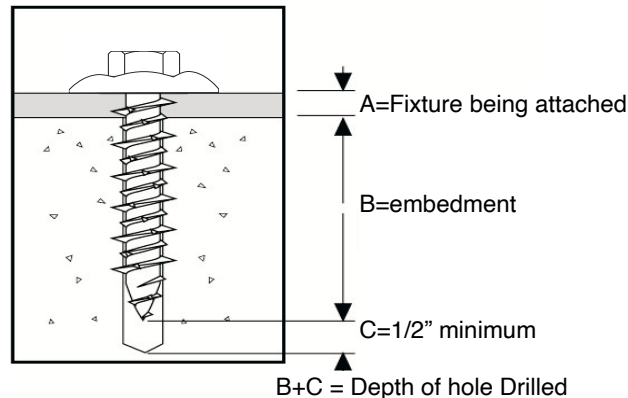

These figures are offered only as a guide and are not guaranteed in any way by International Fasteners, Inc.
 Appropriate safety factors should be applied to these values for specific purposes.
 All International Fasteners, Inc. Fasteners are manufactured to IFI's Performance Specifications and Print Drawings.

QCZ.0923